

## WST2 ESD Wrist-Strap Testing Station

Version: 1

Version date: 16/06/23

### DESCRIPTION


Bondline's standard ESD Wrist Strap Test Station is a unique checker that tests and measures the resistance and continuity of fitted anti-static wrist straps and cords worn on an operator. The Wrist Strap Test Station is supplied with a WST1 meter, wall mounting board, 6 inch cord (0 meg-ohm) and a 9V battery. The WST1 meter has a banana socket and 10mm stud.

The unit has a single test range of 0.75 meg-ohm to 35 meg-ohm, meeting the IEC 61340-5-1 specification (other resistance ranges available on request). The instrument has a green light for PASS (i.e. resistance between 0.75 meg-ohm and 35 meg-ohm) and 2 red lights which indicate either HIGH resistance fail or LOW resistance fail. A buzzer sounds in any fail situation. The test station is easy to use and can be mounted to any wall with ease.

Full instruction guide and calibration certificate supplied with each unit. Calibration is recommended annually. A full calibration service can also be requested. Customised logos and resistance ranges available on request. The product is CE approved.

### FEATURES & BENEFITS

- Supplied with WST1 meter, wall mounting board, 6 inch cord (0 meg-ohm) and 9V battery
- WST1 meter has a banana socket and 10mm stud
- Dimensions of tester: 130mm x 70mm x 25mm
- Single test range of 0.75 meg-ohm to 35 meg-ohm
- Yellow backing board with black text
- Very easy to use
- Each unit is supplied with 1 year calibration certificate – calibration required annually
- Manufactured to the very highest quality allowing qualification to council directives 89/336/EEC
- ESD Susceptibility Symbol printed on backboard
- Compliant to IEC 61340-5-1, CE, UKCA, RoHS and REACH standards

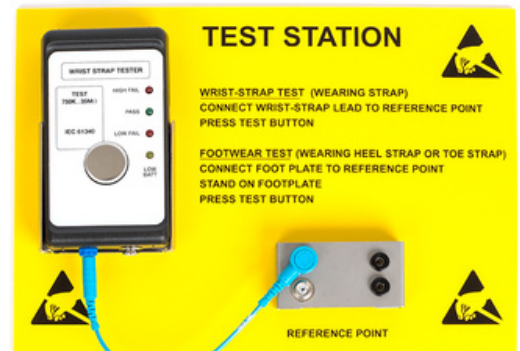


### TESTING GUIDE

When testing, the operator simply connects to the test via the 4mm banana plug socket or 10mm stud. To test, make finger contact with the stainless steel push button, and "press to test". A green LED light will illuminate for PASS or the red LED light will illuminate for FAIL. An audible buzzer will sound if the red fail LED illuminates. If the resistance through the coil cord, wrist band and person exceeds 35 meg ohms, the red fail LED will light. If the resistance is below 750 kilohms, the red fail LED will light. If the 9 volt PP3 battery falls below 6.5 volts during the test, the yellow battery low LED will light.

### PRODUCT INCLUDES

WST2 ESD Wrist Strap Test Station includes: WST1 meter, wall mounting board, 6 inch cord and 9V battery.



# SOLDER CONNECTION

Email: [sales@solderconnection.co.uk](mailto:sales@solderconnection.co.uk) | Tel: +44(0)1291 624 400

## TECHNICAL PROPERTIES

<b>Power Supply:</b>	9 volt PP3 alkaline battery
<b>Temperature Range:</b>	Operating 5°C to 49°C (40°F to 120°F) Storage -15°C to +60°C
<b>Relative Humidity:</b>	0% to 90% (non-condensing)
<b>Accuracy:</b>	+/- 10%
<b>Repeatability:</b>	+/- 10%
<b>Weight:</b>	350g
<b>Dimensions:</b>	130mm x 70mm x 25mm
<b>Lower Limit:</b>	750k +/- 10%
<b>Upper Limit:</b>	35 Meg +/- 10%

The information contained herein is based on data considered accurate and is offered at no charge. No warranty is expressed or implied regarding the accuracy of this data. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of the materials designated.